

SJ45 AJ+

ARTICULATING BOOMS



STANDARD FEATURES

- EASYDRIVE™ Direction sensing drive and steer controls
- SKYRISER™ True vertical rise
- AXLDRIVE™ Axle-based 4WD system
- ELEVATE Live
- Operator controlled locking rear differential and limited slip front differential
- Oscillating steer axle
- Drivable at full height
- 40% Gradeability
- Wet disc SAHR brakes (rear axle)
- Grip lug solid non-marking tyres
- Dual module control system with SKYCODED™ colour coded and numbered wiring
- SMARTORQUE™ Kubota D1305 diesel engine
- ECOSTART (idle-eliminating)
- Swing up cowlings for easy access
- Proportional controls
- 300kg capacity
- 0.76 x 1.83 m Platform
- Bolt-in platform railings
- Lanyard attachment points
- Dual-entry sliding mid rails
- Secondary Guarding Electrical (SGE)
- Overload sensing system
- Wiring for AC outlet on platform
- Tilt alarm (5.0° x 5.0°) with drive and lift cut-out
- Single point emergency lowering
- 355° Non-continuous turret rotation
- Tie down/lifting lugs
- Hourmeter
- Operator horn
- Lockable power disconnect switch
- 7.5 kW Generator (Includes hydraulic oil cooler)
- All motion alarm
- Flashing Light

ACCESSORIES

- Glazier kit
- Pipe rack
- Tool caddy

OPTIONS

- 0.76 x 1.52 m platform
- Side spring hinged entry gate
- Auxiliary top rail (0.76 x 1.83 m Platform only)
- Half-height mesh platform (either size)
- Control box cover
- Diesel scrubber
- Bio oil
- ELEVATE telematics

Preliminary specifications at time of printing.



† Standard lead times may be increased when optional equipment is added, consult factory.

‡ Capacities and machine weights may differ when options are added.

SKYJACK
simply reliable™

SJ45 AJ+ ARTICULATING BOOMS

Dimensions	SJ45 AJ+
Work Height	15.72 m
Platform Height	13.72 m
Horizontal Reach	6.93 m
Up and Over Height	7.45 m
A Platform Size	0.76 x 1.83 m
B Stowed Width	2.29 m
C Tailswing	0.61 m
D Stowed Height	2.06 m
E Transportation Height	2.16 m
F Stowed Length	6.00 m
G Transportation Length	4.75 m
H Wheelbase	2.03 m
I Ground Clearance	0.39 m
Specifications	SJ45 AJ+
Rotation	355° NC
Platform Rotation	170°
Jib Length	1.40 m
Jib Range +/-	+70° / -75°
Weight	5,075 kg
Gradeability	40%
Turning Radius (Inside)	1.50 m
Turning Radius (Outside)	4.34 m
Axle Oscillation	12.70 cm
Drive Speed (High speed)	4.0 km/h
Capacity	300 kg
Maximum Wind Rating	12.5 m/s
Personnel Rating at Max Wind Rating	2
Tyre Size	10 x 31
Tyre Type	Solid Non-Marking
Diesel Engine	Kubota D1305 18.5 KW (24.8 HP)
Fuel Tank Capacity	64 L
Hydraulic Reservoir	91 L

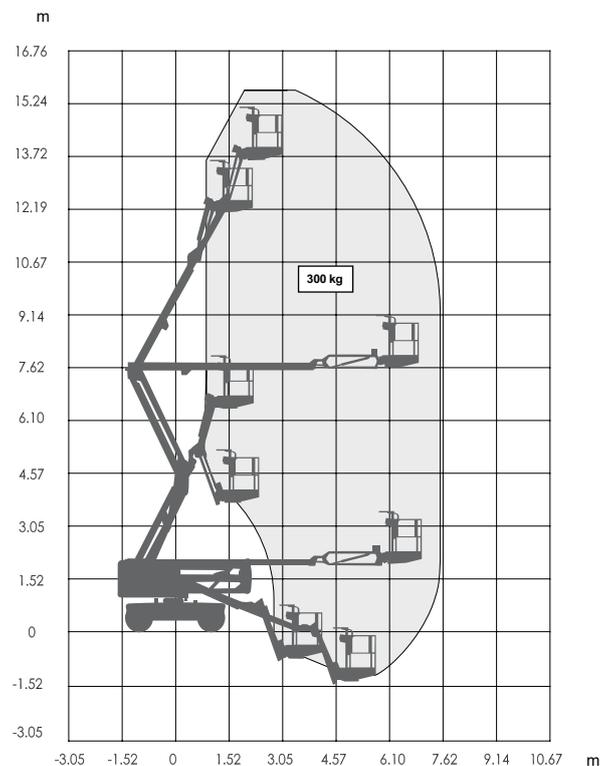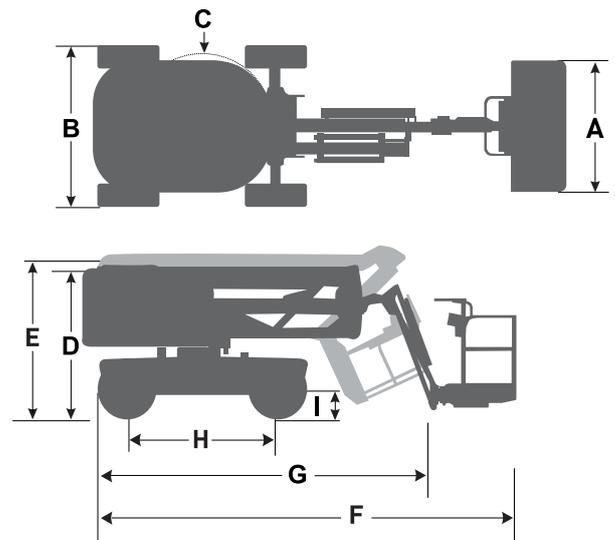

SJ45 AJ+ WORKING ENVELOPE

www.skyjack.com

Skyjack Australia

Unit 1, 35 Honeycomb Drive
 Eastern Creek
 New South Wales 2766
 Australia
 Tel: +61 (0) 2 9854 0700
 Fax: +61 (0) 2 9854 0777
 Email: jcranmer@skyjack.com

SKYJACK
 simply reliable