



# SJ66 T

## TELESCOPIC BOOM

### STANDARD FEATURES

- Axle based 4WD system
- “Detroit Locker” type rear differential and limited slip front differential
- Oscillating axle
- Drivable at full height
- 50% Gradeability
- 65 hp Deutz diesel engine
- Swing out engine tray
- Swing up cowlings
- Modular platform railing system
- Tri-entry sliding mid rail
- Wiring for AC outlet on platform
- EasyDrive™ direction sensing drive and steer controls
- Proportional controls
- Relay based control system
- Colour coded and numbered wiring
- 360° Continuous turret rotation
- Hourmeter
- Operator horn
- Flashing light
- All motion alarm
- Overload sensing system
- 7.5 kW Generator (includes hydraulic oil cooler)
- Tie down/lifting lugs
- Wet disc SAHR brakes (front and rear axle)
- 15 x 19.5 Grip lug foam-filled non-marking tyres
- Secondary guarding electric (SGE)

### ACCESSORIES AND OPTIONS


- 0.91 x 1.83 m Platform
- Half-height mesh platform (either size)
- Diesel scrubber
- Hydraulic oil cooler
- 1/2” Airline to platform
- Glazier kit
- Pipe rack
- Tool caddy
- Rear gate
- Bio oil
- Auxiliary top rail (0.91 x 2.44 m platform only)
- Control box cover

† Standard lead times may be increased when optional equipment is added, consult factory.


‡ Capacities, and machine weights may differ when options are added.

# SJ66 T TELESCOPIC BOOM

Dimensions	SJ66T
Work Height	22.12 m
Platform Height	20.12 m
Horizontal Reach	17.37 m
<b>A</b> Platform Size	0.91 x 2.44 m
<b>B</b> Stowed Width	2.44 m
<b>C</b> Tailswing	1.19 m
<b>D</b> Stowed Height	2.57 m
<b>E</b> Stowed Length	10.34 m
<b>F</b> Wheelbase	2.44 m
<b>G</b> Ground Clearance	0.41 m

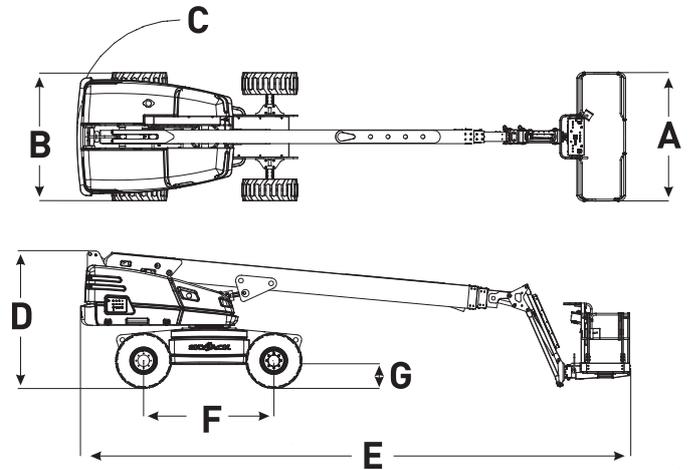

Specifications	SJ66T
Rotation	360° Continuous
Platform Rotation	170°
Jib Length	1.5 m
Jib Range +/-	+65° / -60°
Weight*	12,800 kg
Gradeability - 4WD	50%
Turning Radius (Inside) - 4WD	2.82 m
Turning Radius (Outside) - 4WD	5.05 m
Axle Oscillation	7.62 cm
Drive Speed (Stowed)	7.2 km/h
Capacity	227 kg
Local Floor Load (With Rated Load)	11.62 kg/sq cm
Overall Floor Load (With Rated Load)	1,815 kg/sq m
Maximum # of Persons	2
Tyre Type	Foam-filled NM
Tyre size	15 x 19.5
Diesel Engine	Deutz D2011L04i - 65 HP (48 KW)
Fuel Tank Capacity	170 L
Hydraulic Reservoir	227 L

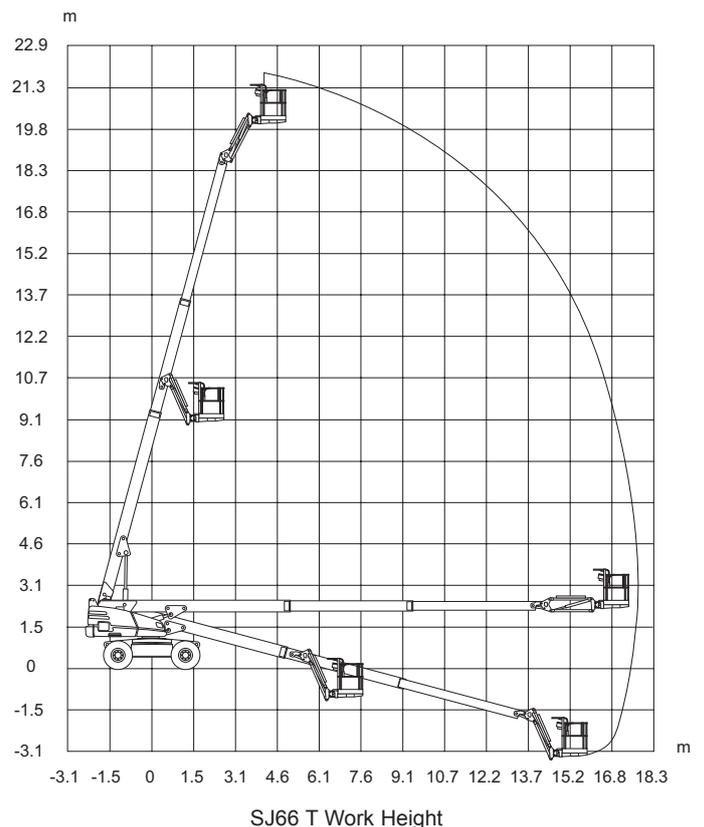

**Skyjack Australia Pty Ltd**  
 Unit 1, 35 Honeycomb Drive  
 Eastern Creek  
 NSW 2766  
 Australia  
 Phone +61 (0) 2 9854 0700  
 Fax +61 (0) 2 9854 0777  
 Email: jcranmer@skyjack.com

[www.skyjack.com](http://www.skyjack.com)

This brochure is for illustrative purpose only and based on the latest information at the time of printing. Skyjack Inc. reserves the right to make changes at any time, without notice, to specifications, standard and optional equipment. Consult the Operating Maintenance and Parts Manuals for proper procedures. AS marked platforms are in conformance to Standard AS/NZS 1418.10:2011.