




Dingli Australia



www.dingliaustralia.com.au






Summit

SC0817-AWD

SELF-PROPELLED ROUGH-TERRAIN SCISSOR LIFTS

Summit

SC0817-AWD

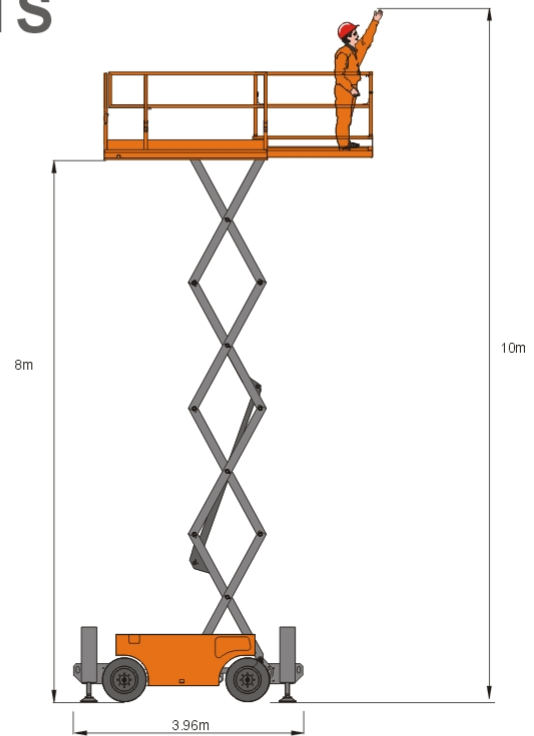

S.W.L	567kg/1250lb
S.W.L on extension	136kg/300lb
Maximum workers number	4



Working height	10.0m/32ft9in
Platform floor height	8.0m/26ft3in



Overall length	3.38m/11ft 1in
Overall width	1.73m/5ft 8in
Overall height(Rails up)	2.32m/7ft 7in
Overall height(Rails down)	1.70m/5ft 7in
Platform size	2.51X1.55m/8ft2inx5ft1in
Platform extension size	1.45m/4ft 9in
Ground clearance	0.19m/7in
Wheelbase	1.85m/6ft 0.8in
Turning radius(Inside)	1.52m/4ft 12in
Turning radius(Outside)	3.68m/12ft 0.8in



Engine	Kubota D905	15.5kw/3600rpm
--------	-------------	----------------



Travel speed(Stowed)	6.1km/h
Travel speed(Raised)	0.8km/h
Up/Down speed	30/35sec



Gradeability	35%
Maximum working slope	2 - 3 °



Hydraulic tank	62.5L
Diesel tank	56.8L



Tyres(foam-filled)	Φ300X600mm
--------------------	------------



Weight	3222kg/7103lb
--------	---------------

Standard equipment

- Proportional controls
- Self-lock gate on platform
- Drivable at full height
- Non marking tyres
- 4WD
- Automatic brakes system
- Swing-out engine tray
- Safety electric pump
- Emergency stop buttons
- Cylinder holding valve
- Onboard diagnostic system
- Tilt sensor with alarm
- Anti-restart engine protection
- All Motion Alarm
- Horn
- Hour meter
- Safety brackets
- Folding guardrails
- Extended platform
- Charger protection
- European III emission engine
- Flashing Beacon
- Automatic leveling hydraulic outriggers
- AC power on the platform

Options

- Overload sensor with alarm
- Platform work lights
- Airline to the platform
- Hydraulic generator
- Hydraulic oil cooler

