

www.dingliaustralia.com.au



E-Tech S0808E

ELECTRIC SCISSOR LIFTS

E-Tech

S0808E





S.W.L	230kg/507lb
S.W.L on extension	113kg/249lb
Max Occupants	2



Working height	10.0m/32ft9in
Platform floor height	8.0m/26ft3in



Overall length	2.48m/8ft1in
Overall width	0,81m/2ft8in
Overall height(Rails up)	2.34m/7ft8in
Overall height(Rails down)	1.88m/6ft2in
Platform size 2.27X0.	81m/7ft5in×2ft8in
Platform extension size	0.9m/2ft11in
Ground clearance(Stowed)	0.1m/4in
Ground clearance(Raised)	0.019m/0.7in
Wheelbase	1.87m/6ft2in
Turning radius(Inside)	0m
Turning radius(Outside)	2.19m/7ft2in




Drive motors	24V/1.5kw
Lifting motor	24V/3kw



Travel speed(Stowed)	5km/h 3miles/h
Travel speed(Raised)	0.8km/h 0.5miles/h
Up/Down speed	22 / 40 sec



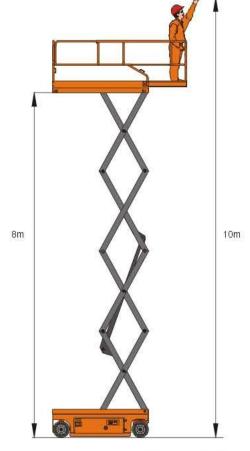

AL CA	Batteries	4X6 V/210 Ah
7	Integrated charger	24V/ 25 A
	Gradeability	25%
	Maximum working slope	2 - 3 "
	Tyres	Ф381X127mm
Ka	Weight	2100kg/4630lb

Standard Equipment

- Proportional controls Automatic pothole protection
- Self-lock gate on platform
- Drivable at full height
- Non marking tyres
- 2WD
- Automatic brakes system
- Emergency lowering systemEmergency stop buttons
- Cylinder holding valve Onboard diagnostic system
- Tilt sensor with alarm
- Motion Alarms

- Horn
- Hour meter
- Safety brackets
- Forklift pockets
- Folding handrails
- Extended platform
- Charger protection Flashing beacon
- Overload sensor with alarm AC power to the platform

Options

- Platform work lights
- Airline to the platform

