


www.dingliaustralia.com.au




E-Tech S1012E

ELECTRIC SCISSOR LIFTS

E-Tech S1012E





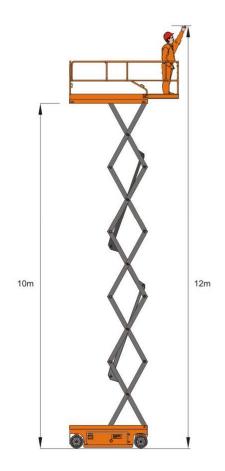



S.W.L	320kg/705lb
S.W.L on extension	113kg/249lb
Max Occupants	2 Indoor/1 Outdoor



Working height	12.0m/39ft4in
Platform floor height	10.0m/32ft9in



2.48m/8ft1in
1.15m/3ft9in
2.47m/8ft1in
1.99m/6ft6in
12m/7ft5inx3ft8in
0.9m/2ft11in
0.1m/4in
0.019m/0.7in
1.87m/6ft2in
0m
2.33m/7ft7in



Drive motors	24V/1.5kw
Lifting motor	24V/3kw



Travel speed(Stowed)	5km/h 3miles/h
Travel speed(Raised)	0.8km/h 0.5miles/h
Up/Down speed	30/38 sec
Wind Rated	0-12.5m/s



24V/25A
25%
2-3°



100 to 100 100 100 100 100 100 100 100 100 10	330,000
Tyres	Ф 381x127mm
Weight	2490kg/5490lb

Standard Equipment

- Proportional Controls
- Automatic Pothole Protection
- Self-lock Gate On Platform
- Drivable At Full Height
- Non-marking Tyres
- 2WD
- Automatic Brakes System
- Emergency Lowering System Emergency Stop Buttons
- Cylinder Holding Valve
- Onboard Diagnostic System
- Tilt Sensor With Alarm
- Motion Alarms

- Horn
- Hour Meter
- Safety Brackets
- Forklift Pockets
- Folding Handrails
- Extended Platform
- Charger Protection
- Flashing Beacon
- Overload Sensor With Alarm
- AC Power To The Platform

Options

- Platform Work Lights
- Airline To The Platform

