

E-Tech S036-RS

**SELF PROPELLED SCISSOR LIFT
(ELECTRIC MOTOR DRIVE)**




Dingli E-Tech S036-RS

Self-Propelled Scissor Lift (Electric Motor Drive)

Standard Equipment:

- Proportional controls
- Self-lock gate on platform
- Automatic pothole protection
- Onboard diagnostic system
- Non marking tyre
- Automatic brakes system
- Emergency lowering system
- Emergency stop button
- Cylinder holding valve
- Extended platform
- Horn
- Forklift pockets
- Charger protection
- All motion alarm
- 2WD electric AC brushless motors
- Scissor pack safety prop
- Hour meter
- LED flashing strobe
- Tilt sensor with alarm
- Folding guardrails

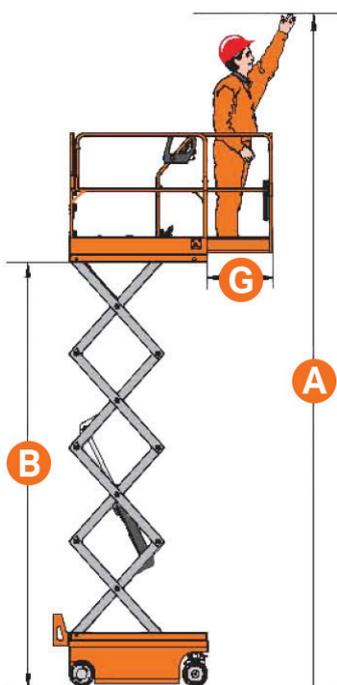

Specifications

S036-RS

	S.W.L	240 kg
	S.W.L on Extension	100 kg
	Max. Occupants (Indoor / Outdoor)	2 / 1
	A Working Height	560 m
	B Platform Floor Height	3.60 m
	C Overall Length (With Ladder)	1.44 m
	Overall Length (Without Ladder)	1.29 m
	D Overall Width	0.76 m
	E Overall Height (Rails Up)	2.03 m
	Overall Height (Rails Down)	1.67 m
	Platform Size (Length / Width F)	1.29 x 0.70 m
	G Platform Extension Size	0.60 m
	Ground Clearance (Stowed)	0.06 m
	Ground Clearance (Raised)	0.015 m
	Wheelbase	1.05 m
	Turning Radius (Inside / Outside)	0.40 m / 1.55 m
	Drive Motors	2 X 24 VDC / 0.4 kW
	Lifting Motor	24 VDC / 0.8 kW
	Travel Speed (Stowed)	4.2 km/h
	Travel Speed (Raised)	1.1 km/h
	Up / Down Speed	34 / 28 sec
	Gradeability	25%
	Max Working Slope (CE)	1.5° / 3°
	Max Working Slope (ANSI)	2° / 3°
	Batteries	2 x 12 V / 85 Ah
	Integrated Charger	24 V / 10 A
	Tyres	ø 230 x 80 mm
	Weight	880 kg



* Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only.