

12

2714

SYDNEY MELBOURNE BRISBANE TAMWORTH

monitor.net.au • 1800 025 024

## MONITOR 2714 SPIDER LIFT

98

IL THE



## **MONITOR** 2714

The Monitor 2714 Spider Lift never ceases to impress with its huge up-and-over outreach. At only 1.99 m stowed height, this Spider Lift delivers the most reach from the smallest dimensions.

An unbeatable machine for confined area access to taller heights.

The tracks expand to 1290 mm for stability offroad, and retract to only 890 mm which allows the 2714 to go anywhere!

Uniquely these Spider Lifts can rotate a full 360 degrees even when legs are set in the narrow position, and up to 15 m of horizontal outreach can be achieved in wide set.


Strength and rigidity are a standout feature of this machine; the first time you take this one up off the ground you come back wearing a very wide smile. It has to be experienced to believe how stable this platform is, making it ideal for the most demanding of applications.





2




## TECHNICAL SPECIFICATIONS

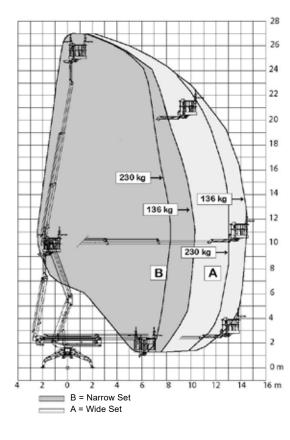



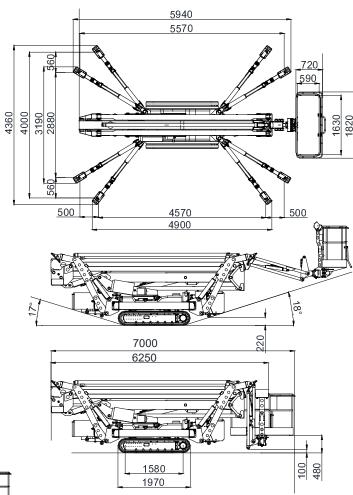

| Max working height                         | 27.00 m                         |
|--|---------------------------------|
| Max working height in narrow set           | 27.00 m                         |
| Max horizontal outreach                    | 15.10 m                         |
| Max rated capacity                         | 230 kg                          |
| Weight: Engine + 240V                      | ED 5200 kg                      |
| : Engine + Lithium Batteries               | LBD 5340 kg                     |
| Turret rotation                            | 360°                            |
| Basket rotation                            | 172°                            |
| Ground pressure driving (approx)           | 70.15 kN/m2                     |
| Max stabiliser force                       | 34.4 kN                         |
| Max stabiliser pressure (std foot pad)     | 673 kN/m2                       |
| Traffic load (live load) travelling        | 5.42 kN/m2                      |
| Traffic load (live load) stabilised wide   | 2.84 kN/m2                      |
| Traffic load (live load) stabilised narrow | 2.90 kN/m2                      |
| Auto levelling                             | Std                             |
| Max slope for stabilisers (no extra pads)  | 13°                             |
| Gradeability lengthwise                    | 17°                             |
| Gradeability sideways                      | 12°                             |
| Standard engine                            | Kubota 22 Hp Diesel             |
| Dual power options                         | 240V or Batteries or<br>Lithium |
| Expanding tracks                           | Std                             |
| Max drive speed                            | 1.8 km/h                        |
| Radio control                              | Std                             |
| Electric emergency lowering                | Std                             |
| Hydraulic winch                            | Optional                        |
| (All specs E&OE and subject to change)     |                                 |



~

 $\square$ 



2

## **GET IN TOUCH**

You may contact us at monitor.net.au, or call us at 1800 025 024.

27.14

monitor

THE READ THE STRUCTURE ACT

