





# **Rizer**


---

## **MV060-RS**


# ELECTRIC ALUMINIUM WORK PLATFORM SINGLE MAST


## Rizer MV060-RS

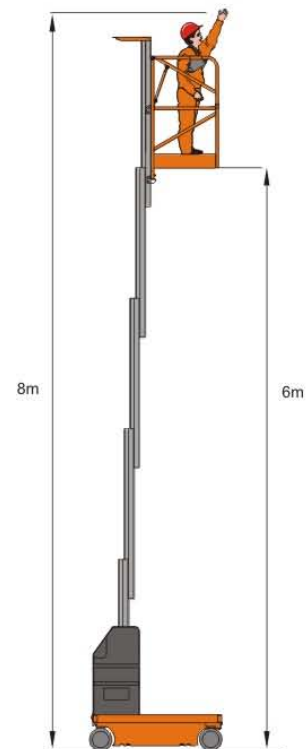



	<b>S.W.L</b>	150kg/330lb
	<b>Max. occupants</b>	1


	<b>Working height</b>	8.00m/26ft3in
	<b>Platform floor height</b>	6.00m/19ft8in

	<b>Overall length</b>	1.41m/4ft7in
	<b>Overall width</b>	0.76m/2ft6in
	<b>Overall height</b>	1.99m/6ft6in
	<b>Platform size</b>	0.78m x 0.70m / 2ft7in x 2ft4in
	<b>Platform extension size</b>	0.55m / 1ft10in
	<b>Ground clearance</b>	0.05m / 2in
	<b>Wheelbase</b>	1.07m / 3ft6in
	<b>Turning radius (Inside)</b>	0
	<b>Turning radius (Outside)</b>	1.55m / 5ft1in

	<b>Drive motors</b>	2x24V DC/0.5kw
	<b>Lifting motor</b>	24V DC/2kw

	<b>Travel speed</b>	
	<b>Stowed</b>	4km/h 2.5miles/h
	<b>Raised</b>	1.1km/h 0.68miles/h
	<b>Up/Down speed</b>	24/25 sec

	<b>Batteries</b>	2x12V/120Ah
	<b>Integrated charger</b>	24V/10A

	<b>Gradeability</b>	25%
	<b>Maximum slope</b>	2-3°

	<b>Tyres</b>	φ 305x100mm
---	--------------	-------------

	<b>Weight</b>	1010kg/2226lb
---	---------------	---------------

### Standard Equipment

- Proportional Controls
- Automatic Pothole Protection
- Self-lock Gate On Platform
- Drivable At Full Height
- Non-marking Tyres
- 2WD
- Automatic Brake System
- Emergency Lowering System
- Emergency Stop Button
- Cylinder Holding Valve
- Onboard Diagnostic System
- Tilt Sensor With Alarm
- All Motion Alarm
- Horn
- Hour Meter
- Forklift Pockets
- Charger Protection.
- Flashing Beacon
- Overload Sensor With Alarm
- AC Power To The Platform

### Options

- Platform Work Lights
- Airline To Platform

